
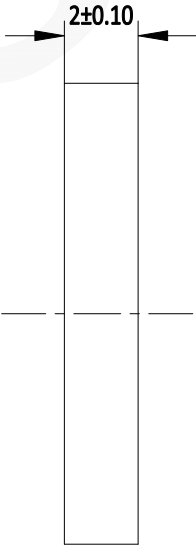


注释:

- 1. 材料: 紫外熔融石英
- 2. 入射角: $0\pm2^{\circ}$
- 3. 光洁度: 60-40
- 4. 中心波长: 830nm
- 5. 半带宽: 3.2 nm (typical);
5.8 nm (maximum)
- 6. 透过带: Tabs>90% 830nm
- 7. 截止带1: ODabs>5@639.1-821.7nm
- 8. 截止带2: ODabs>6@763.6-817.6nm
- 9. 截止带3: ODabs>6@842.5-913nm
- 10. 截止带4: ODabs>5@838.3-1183.7nm
- 11. 激光损伤阈值: 0.1J/cm²@532nm (10ns pulse width)

最小有效孔径 $\phi 10.00$

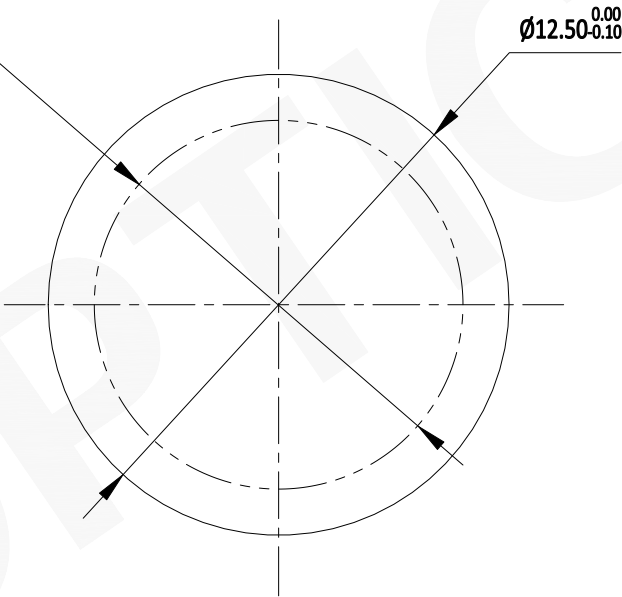

注:

- 1: 仅供参考, 禁止使用本图加工生产.
- 2: 图纸细节如有更改不再另行通知.

 GU OPTICS			
联合光科技（北京）有限公司			
名称	高性能窄带带通滤光片-未封装 D=12.50mm		
产品编号	199430	单位: mm	投影 