


- 注释:
- 1. 材料: 紫外熔融石英
 - 2. 入射角: $0\pm2^\circ$
 - 3. 光洁度: 60-40
 - 4. 中心波长: 355nm
 - 5. 半带宽: 1.3 nm (typical);
2.5 nm (maximum)
 - 6. 透过带: Tabs>80% 355nm
 - 7. 截止带1: ODabs>5@314.8-351.5nm
 - 8. 截止带2: ODabs>6@326.6-349.7nm
 - 9. 截止带3: ODabs>6@360.3-390.5nm
 - 10. 截止带4: ODabs>5@358.6-422.5nm
 - 11. 激光损伤阈值: $0.1\text{J}/\text{cm}^2$ @532nm (10ns pulse width)

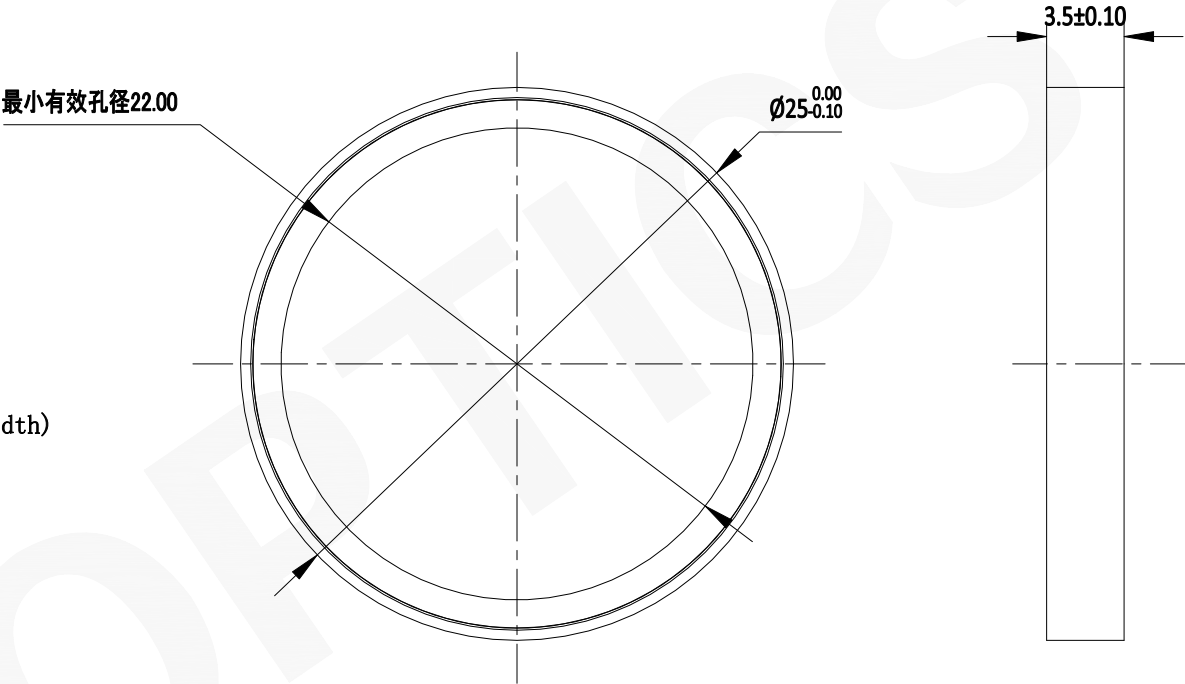

- 注:
- 1: 仅供参考, 禁止使用本图加工生产.
 - 2: 图纸细节如有更改不再另行通知.

 GU OPTICS			
联合光科技 (北京) 有限公司			
名称	高性能窄带带通滤光片-已封装 D=25.00mm		
产品编号	199435	单位: mm	投影 