


注释:

- 1. 材料: 紫外熔融石英
- 2. 入射角: $0\pm2^\circ$
- 3. 光洁度: 60-40
- 4. 中心波长: 830nm
- 5. 半带宽: 3.2 nm (typical);
5.8 nm (maximum)
- 6. 透过带: $T_{\text{abs}} > 90\%$ 830nm
- 7. 截止带1: $OD_{\text{abs}} > 5@639.1\text{-}821.7\text{nm}$
- 8. 截止带2: $OD_{\text{abs}} > 6@763.6\text{-}817.6\text{nm}$
- 9. 截止带3: $OD_{\text{abs}} > 6@842.5\text{-}913\text{nm}$
- 10. 截止带4: $OD_{\text{abs}} > 5@838.3\text{-}1183.7\text{nm}$
- 11. 激光损伤阈值: $0.1\text{J}/\text{cm}^2@532\text{nm}$ (10ns pulse width)

最小有效孔径22.00

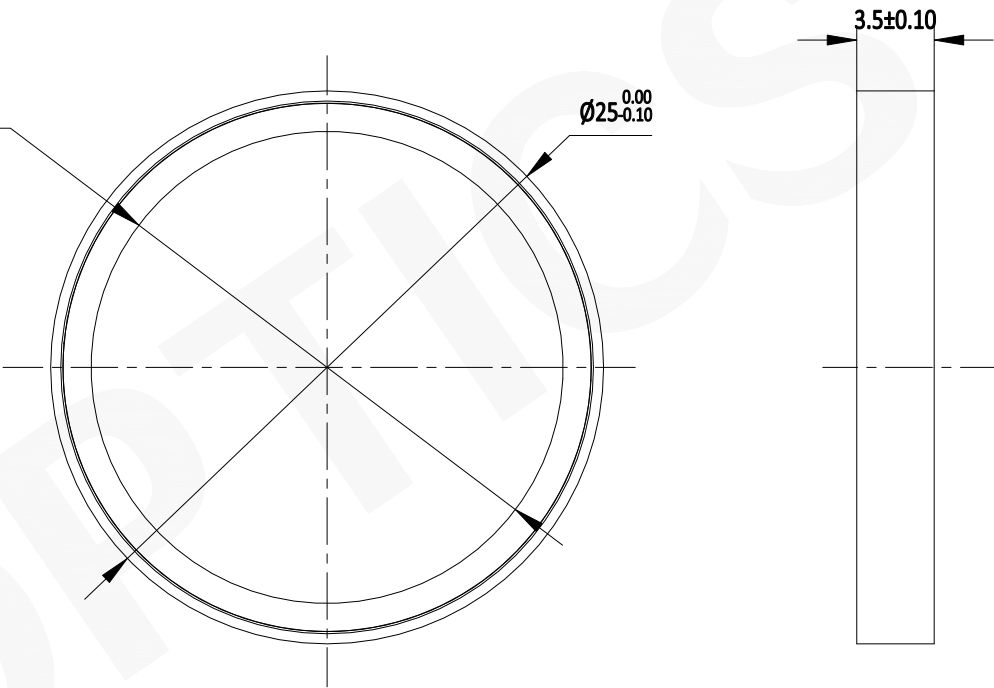

注:

- 1: 仅供参考, 禁止使用本图加工生产.
- 2: 图纸细节如有更改不再另行通知.

 GU OPTICS			
联合光科技（北京）有限公司			
名称	高性能窄带带通滤光片-已封装 D=25.00mm		
产品编号	199443	单位: mm	投影 