


注释:

- 1. 材料: 紫外熔融石英
- 2. 入射角: $0\pm5^{\circ}$
- 3. 光洁度: 60-40
- 4. 中心波长: 525nm
- 5. 最小带宽: 50nm
- 6. 透过带: $T_{avg}>93\%$ 500-550nm
- 7. 截止带1: $OD_{avg}>5@200-400nm$
- 8. 截止带2: $OD_{avg}>5@400-446nm$
- 9. 截止带3: $OD_{avg}>10@446-486nm$
- 10. 截止带4: $OD_{abs}>3.5@493nm$
- 11. 截止带5: $OD_{avg}>5@560.5-800nm$
- 12. 截止带6: $OD_{avg}>2.5@800-925nm$
- 13. 截止带7: $OD_{avg}>2@925-1100nm$


注:

- 1: 仅供参考, 禁止使用本图加工生产.
- 2: 图纸细节如有更改不再另行通知.

最小有效孔径 $\phi 10.00$

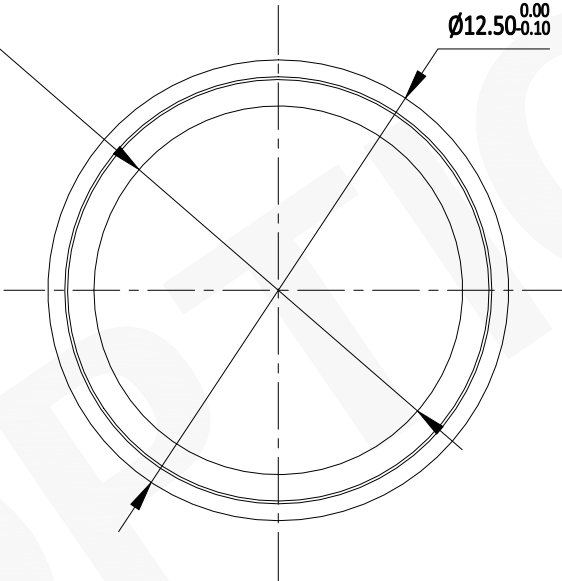

3.5 $\pm$ 0.10

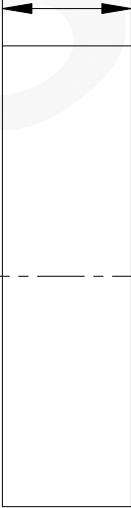

 GU OPTICS

联合光科技（北京）有限公司

名称	荧光带通滤光片-已封装 D=12.50mm			
产品编号	199521	单位: mm	投影	