



注释:

- 1. 材料: 紫外熔融石英
- 2. 入射角: $0\pm5^{\circ}$
- 3. 光洁度: 60-40
- 4. 中心波长: 520nm
- 5. 最小带宽: 35nm
- 6. 透过带: $T_{avg}>93\%$ 502.5-537.5nm
- 7. 截止带1: $OD_{avg}>4@200-400nm$
- 8. 截止带2: $OD_{avg}>4@400-457.5nm$
- 9. 截止带3: $OD_{avg}>10@457.5-487.5nm$
- 10. 截止带4: $OD>3.5@495nm$
- 11. 截止带5: $OD_{avg}>5@553-700nm$
- 12. 截止带6: $OD_{avg}>5@700-925nm$

最小有效孔径 $\phi 10.00$

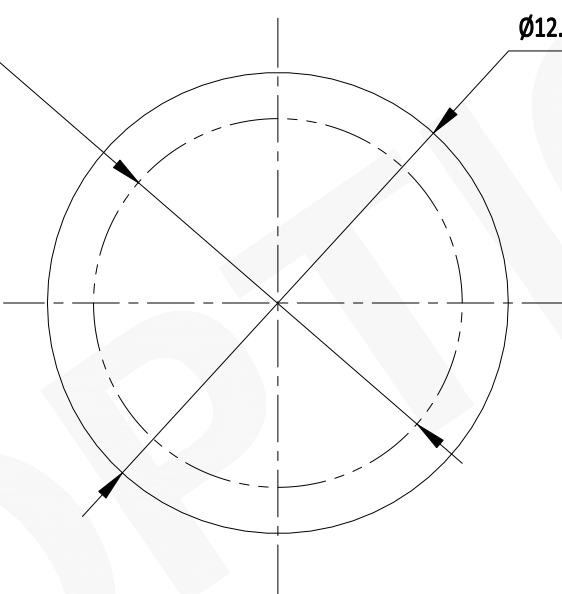

$\phi 12.50^{0.00}_{-0.10}$

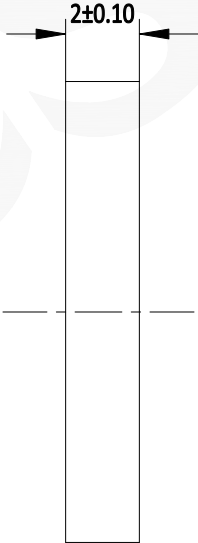

2 ± 0.10

注:

- 1: 仅供参考, 禁止使用本图加工生产.
- 2: 图纸细节如有更改不再另行通知.

 GU OPTICS			
联合光科技(北京)有限公司			
名称	荧光带通滤光片-未封装 D=12.50mm		
产品编号	199651	单位: mm	投影 