
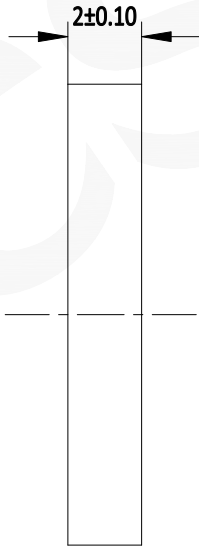


注释:

- 1. 材料: 紫外熔融石英
- 2. 入射角: $0\pm5^\circ$
- 3. 光洁度: 60-40
- 4. 中心波长: 832nm
- 5. 最小带宽: 37nm
- 6. 透过带: $T_{avg}>93\%$ @813.5-850.5nm
- 7. 截止带1: $OD_{avg}>1$ @200-400nm
- 8. 截止带2: $OD_{avg}>2$ @400-545nm
- 9. 截止带3: $OD_{avg}>5$ @545-749nm
- 10. 截止带4: $OD_{avg}>10$ @749-790nm
- 11. 截止带5: $OD_{avg}>3.5$ @801.5nm
- 12. 截止带6: $OD_{avg}>5$ @871.5-925nm
- 13. 截止带7: $OD_{avg}>2$ @925-1100nm

最小有效孔径 $\phi 10.00$

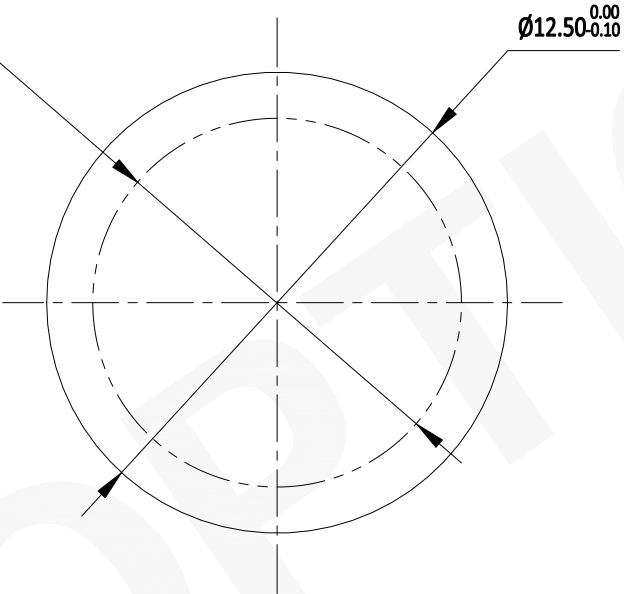

注:

- 1: 仅供参考, 禁止使用本图加工生产.
- 2: 图纸细节如有更改不再另行通知.

			
联合光科技(北京)有限公司			
名称	荧光带通滤光片-未封装 D=12.5mm		
产品编号	199739	单位: mm	投影 