
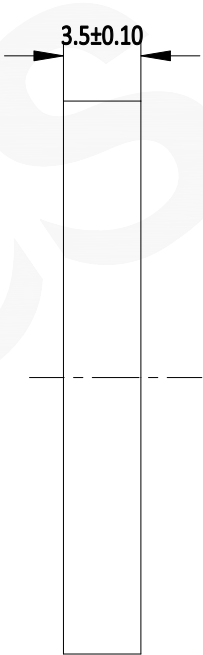


注释:

- 1. 材料: 紫外熔融石英
- 2. 入射角:  $0\pm5^\circ$
- 3. 光洁度: 60-40
- 4. 中心波长: 510nm
- 5. 最小带宽: 42nm
- 6. 透过带:  $T_{avg}>90\%$  489-531nm
- 7. 截止带1:  $OD_{avg}>5@200-475nm$
- 8. 截止带2:  $OD_{avg}>3.3@475-480nm$
- 9. 截止带3:  $OD_{avg}>3.3@545-550nm$
- 10. 截止带4:  $OD_{avg}>5@550-720nm$

最小有效孔径22.00

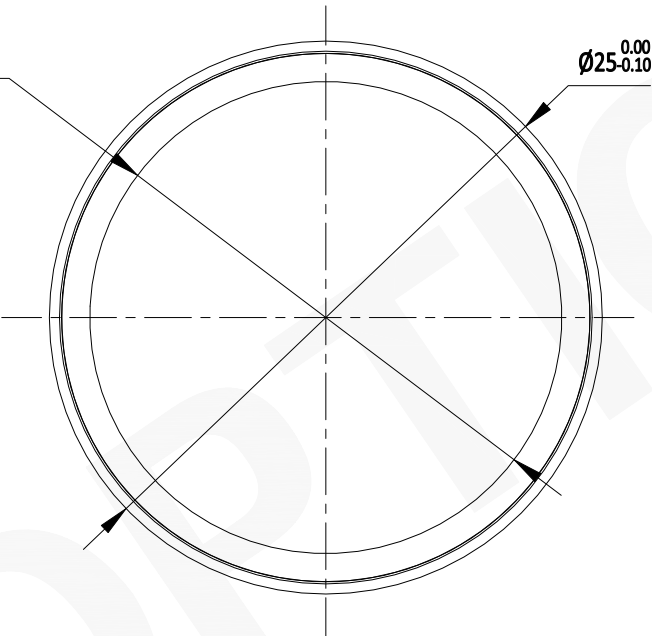

注:

- 1: 仅供参考, 禁止使用本图加工生产.
- 2: 图纸细节如有更改不再另行通知.

			
联合光科技(北京)有限公司			
名称	荧光带通滤光片-已封装 D=25mm		
产品编号	199788	单位: mm	投影 