


- 注释:
- 1. 材料: 紫外熔融石英
 - 2. 入射角: $0\pm5^\circ$
 - 3. 光洁度: 60-40
 - 4. 中心波长: 710nm
 - 5. 最小带宽: 40nm
 - 6. 透过带: $T_{avg}>93\%$ @690-730nm
 - 7. 截止带1: $OD_{avg}>5$ @200-673nm
 - 8. 截止带2: $OD>3.5$ @741nm
 - 9. 截止带3: $OD_{avg}>10$ @752-798nm
 - 10. 截止带4: $OD_{avg}>4.5$ @798-925nm
 - 11. 截止带5: $OD_{avg}>2$ @925-1100nm

- 注:
- 1: 仅供参考, 禁止使用本图加工生产.
 - 2: 图纸细节如有更改不再另行通知.

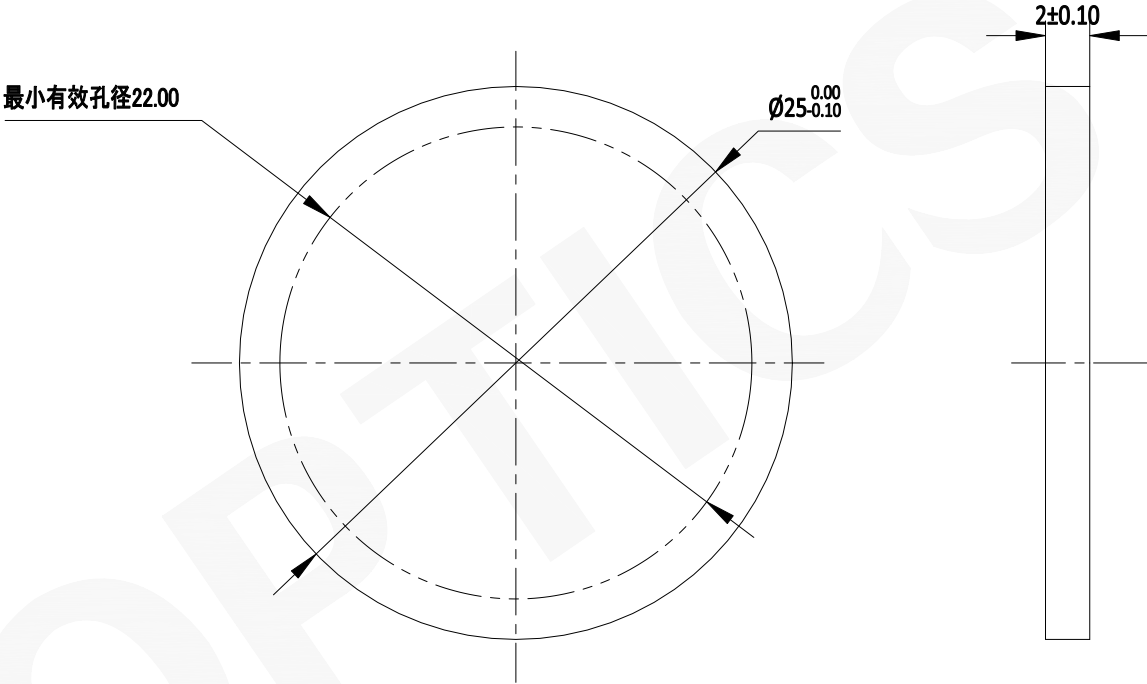

 GU OPTICS			
联合光科技（北京）有限公司			
名称	荧光带通滤光片-未封装 D=25mm		
产品编号	200016	单位: mm	投影 