


注释:

- 1. 材料: 紫外熔融石英
- 2. 入射角: $0\pm2^\circ$
- 3. 激光波长: 1064nm
- 4. 光洁度: 60-40
- 5. 通光孔径: $\geq 10\text{mm}$
- 6. 边缘陡度: 0.20%
- 7. 边缘陡度: 2.1nm
- 8. 边缘陡度: 18.8cm^{-1}
- 9. 过渡带宽: 5.3nm
- 10. 过渡带宽: 47cm^{-1}
- 11. 边缘波长: 832.5nm
- 12. 透过带: $T_{\text{avg}} > 93\%$ @ 1070.9-2000nm
- 13. 截止带1: $OD_{\text{abs}} > 6$ @ 1064nm
- 14. 截止带2: $OD_{\text{avg}} > 6$ @ 852-1064nm (typical)
- 15. 激光损伤阈值: 0.5 J/cm^2 @ 266 nm (10 ns pulse width),
 1 J/cm^2 @ 532 nm (10 ns pulse width)

最小有效孔径 $\phi 10.00$

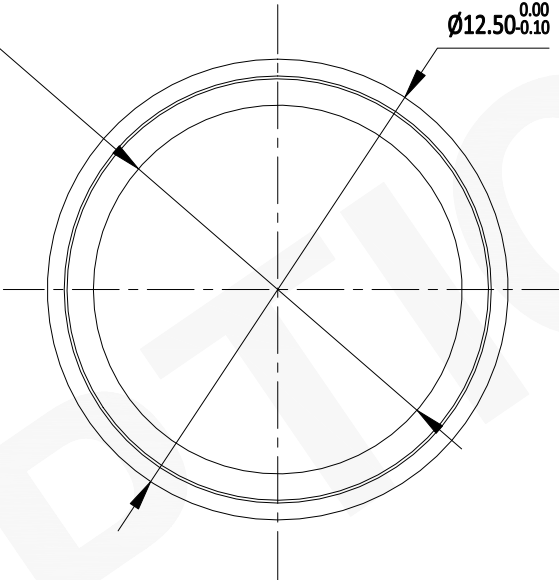

3.5 $\pm$ 0.10

$\phi 12.50^{+0.00}_{-0.10}$

注:

- 1: 仅供参考, 禁止使用本图加工生产.
- 2: 图纸细节如有更改不再另行通知.

 GU OPTICS			
联合光科技（北京）有限公司			
名称	超陡长波通滤光片-已封装 1064nm D=12.5mm		
产品编号	208685	单位: mm	投影 