


注释:

- 1. 材料: 紫外熔融石英
- 2. 入射角: 45° with a shift of ≤0.20%/degree
(35-55°) see MyLight for performance
- 3. 光洁度: 60-40
- 4. 激光波长: 830nm
- 5. 边缘陡度: 0.5%
- 6. 边缘陡度: 4.2nm
- 7. 边缘陡度: 59.9cm⁻¹
- 8. 过渡带宽: 8.3nm
- 9. 边缘波长: 836nm
- 10. 反射带: Rabs>94%@830 nm
- 11. 反射带 (P偏振光): Rabs>90%@830 nm
- 12. 反射带 (S偏振光): Rabs>98%@830 nm
- 13. 透过带: Tavg>93%@840.8-1286.5 nm
- 14. 激光损伤阈值: 1J/cm² @532nm (10ns pulse width)

注:

- 1: 仅供参考, 禁止使用本图加工生产.
- 2: 图纸细节如有更改不再另行通知.

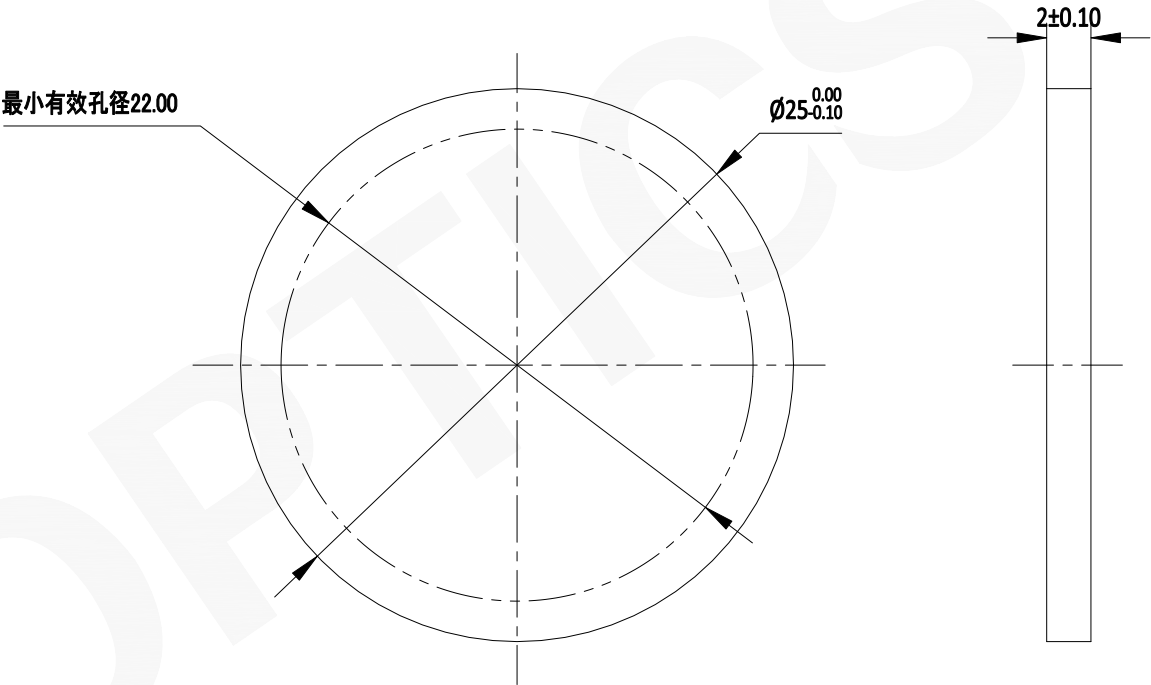

 GU OPTICS			
联合光科技 (北京) 有限公司			
名称	高性能二向色分光滤光片-未封装 D=25.00mm		
产品编号	238598	单位: mm	投影 